
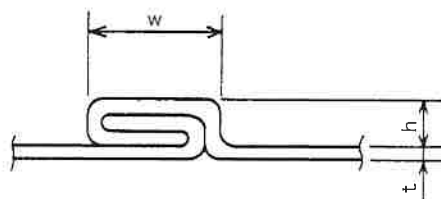


スパイラルダクト規格表

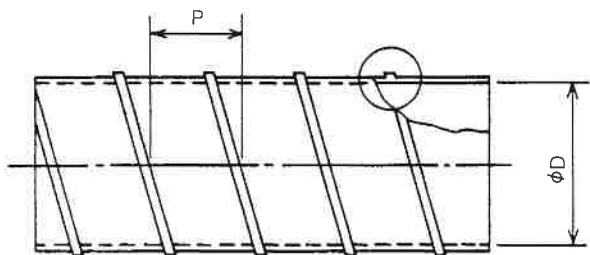

(単位mm)

呼び径 φD	板厚 # t	ハゼ巾 W	ピッチ P	ハゼ高 h	質量 kg/m
75	26 0.5	6.2	82	1.5	1.25
100	26 0.5	6.2	82	1.5	1.66
125	26 0.5	6.2	82	1.5	2.06
150	26 0.5	6.2	132	1.5	2.35
	24 0.6	6.2	132	1.8	2.80
	22 0.8	8.5	132	2.4	3.79
175	26 0.5	6.2	132	1.5	2.73
	24 0.6	6.2	132	1.8	3.31
	22 0.8	8.5	132	2.4	4.44
200	26 0.5	6.2	132	1.5	3.09
	24 0.6	6.2	132	1.8	3.86
	22 0.8	8.5	132	2.4	5.03
225	26 0.5	6.2	132	1.5	3.48
	24 0.6	6.2	132	1.8	4.21
	22 0.8	8.5	132	2.4	5.68
250	26 0.5	6.2	132	1.5	3.80
	24 0.6	6.2	132	1.8	4.63
	22 0.8	8.5	132	2.4	6.20
275	26 0.5	6.2	132	1.5	4.10
	24 0.6	6.2	132	1.8	5.12
	22 0.8	8.5	132	2.4	6.81
300	26 0.5	6.2	132	1.5	4.70
	24 0.6	6.2	132	1.8	5.50
	22 0.8	8.5	132	2.4	7.23
325	26 0.5	6.2	132	1.5	5.10
	24 0.6	6.2	132	1.8	5.98
	22 0.8	8.5	132	2.4	7.88
350	26 0.5	6.2	132	1.5	5.48
	24 0.6	6.2	132	1.8	6.50
	22 0.8	8.5	132	2.4	8.54
375	26 0.5	6.2	132	1.5	5.87
	24 0.6	6.2	132	1.8	6.99
	22 0.8	8.5	132	2.4	9.19
400	26 0.5	6.2	132	1.5	6.26
	24 0.6	6.2	132	1.8	7.57
	22 0.8	8.5	132	2.4	9.94
425	26 0.5	6.2	132	1.5	6.72
	24 0.6	6.2	132	1.8	8.03
	22 0.8	8.5	132	2.4	10.55

呼び径 φD	板厚 # t	ハゼ巾 W	ピッチ P	ハゼ高 h	質量 kg/m
450	26 0.5	6.2	132	1.5	7.05
	24 0.6	6.2	132	1.8	8.48
	22 0.8	8.5	132	2.4	11.15
475	24 0.6	6.2	132	1.8	8.92
	22 0.8	8.5	132	2.4	11.72
	20 1.0	8.5	132	3.0	14.34
500	24 0.6	6.2	132	1.8	9.35
	22 0.8	8.5	132	2.4	12.29
	20 1.0	8.5	132	3.0	15.03
525	24 0.6	6.2	132	1.8	9.60
	22 0.8	8.5	132	2.4	12.61
	20 1.0	8.5	132	3.0	15.45
550	24 0.6	6.2	132	1.8	10.28
	22 0.8	8.5	132	2.4	13.50
	20 1.0	8.5	132	3.0	16.55
575	24 0.6	6.2	132	1.8	10.77
	22 0.8	8.5	132	2.4	14.14
	20 1.0	8.5	132	3.0	17.33
600	24 0.6	6.2	132	1.8	11.25
	22 0.8	8.5	132	2.4	14.77
	20 1.0	8.5	132	3.0	18.10
650	24 0.6	6.2	132	1.8	12.19
	22 0.8	8.5	132	2.4	16.15
	20 1.0	8.5	132	3.0	19.62
700	24 0.6	6.2	132	1.8	13.13
	22 0.8	8.5	132	2.4	17.29
	20 1.0	8.5	132	3.0	21.13
750	22 0.8	8.5	132	2.4	18.53
	20 1.0	8.5	132	3.0	22.66
	22 0.8	8.5	132	2.4	19.77
800	20 1.0	8.5	132	3.0	24.18
	22 0.8	8.5	132	2.4	20.90
	20 1.0	8.5	132	3.0	25.69
900	22 0.8	8.5	132	2.4	22.14
	20 1.0	8.5	132	3.0	27.21
	22 0.8	8.5	132	2.4	23.43
950	20 1.0	8.5	132	3.0	28.28
	22 0.8	8.5	132	2.4	24.72
	20 1.0	8.5	132	3.0	30.35

※質量は、亜鉛スパイラルダクトに適用